



P4GB 000101
USA.



INVESTOR IN PEOPLE

3

CERTIFIED COPY OF PRIORITY DOCUMENT

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

JC857 U.S. PTO

09/918834



the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., p.l.c., L.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

18 MAY 2007


THIS PAGE BLANK (USPTO)

02 AUG 2000

1/77

Request for grant of a patent

(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

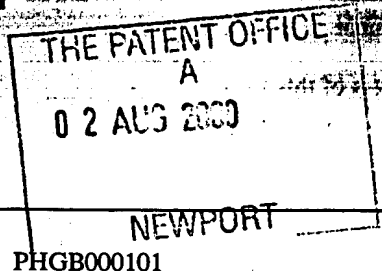

The Patent Office
Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

PHGB000101

2. Patent application number

(The Patent Office will fill in this part)

0018843.3

3. Full name, address and postcode of the or of each applicant (underline all surnames)

KONINKLIJKE PHILIPS ELECTRONICS N.V.
GROENEWOUDSEWEG 1
5621 BA EINDHOVEN
THE NETHERLANDS

Patents ADP Number (if you know it) **741 9294001**

02AUG00 E557540-3 D02879
P01/7700 0.00-0018843.3

If the applicant is a corporate body, give the country/state of its incorporation

THE NETHERLANDS

4. Title of the invention

DATA DECODING

5. Name of your agent (if you have one)
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

ARTHUR S. ANDREWS
Philips Corporate Intellectual Property
Cross Oak Lane
Redhill
Surrey RH1 5HA

Patents ADP number (if you know it) **76 5888 3001**

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority Application number
(if you know it)

Date of filing
(day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.

Do not count copies of the same document.

Continuation sheets of this form

Description	22
Claims(s)	4
Abstract	1
Drawings	11

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination

(*Patents Form 10/77*)

Any other documents

(*Please specify*)

11.

I/We request the grant of a patent on the basis of this application.

Signature

A.S. Andrews

Date 31.07.2000

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 815276

(A.S. Andrews)

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" *Patents Form 7/77* will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTION

DATA DECODING

5 The invention relates to an arrangement for selecting the largest of a plurality of input currents and adding a further current to the selected current and to a Viterbi decoder including such arrangements.

 There is a continuing and increasing desire for larger data capacity on optical discs. Additionally, there is a desire for greater speed in reading the
10 data from the disc. These two demands arise from the increasing use of optical storage media in video and high speed data applications and both these applications require performance far greater than that achieved in the original audio compact disc applications. As a result there is a demand for methodologies which allow for recovery of the data at rates which are at or
15 near the limit achievable given the physics of the media, mechanics, optics, and electronics.

 One of the consequences is an increasing level of inter-symbol interference in the data channel when reading data from the disc. The use of Viterbi decoders in reading data from optical discs has been disclosed in US-
20 A-5661709 and US-A-5450389. These documents disclose arrangements in which the input signal is digitised in an A/D converter and all the manipulations are carried out in the digital domain. DVD systems currently being designed have the capability of decoding data at sixteen times nominal speed which represents a channel bit rate in excess of 400 Mb/s. As a result it requires very
25 high speed digital signal processing leading to increased costs.

 It is an object of the invention to enable the provision of a decoder, particularly, but not exclusively, for data read at high speed from an optical disc without requiring the use of high speed digital signal processors.

30

 The invention provides an arrangement for selecting the largest of a plurality of input currents and adding a further current to the selected current,

the arrangement comprising: a plurality of inputs for receiving said input currents; a further input for receiving said further current; an output for delivering an output current proportional to the sum of the largest of the input currents and the further current; means for feeding each of the received input
5 currents to the main current conducting path of a respective transistor, each of the transistors having its control electrode connected to a common point; a respective follower transistor connected between the input and the common point; a mirror transistor having its control electrode connected to the common point for producing a current whose value is related to that of the largest input
10 current; a summing arrangement for adding the largest of the input currents or a current proportional thereto to the further current or a current proportional thereto, said summing arrangement having a first input for receiving the current from the mirror transistor, a second input for receiving the further current, and an output; and means for coupling the output of the summing
15 arrangement to the output of the arrangement.

The invention enables the largest of a plurality of input currents to be selected using minimal circuitry and also enables a further current to be added to the selected current. Such an arrangement finds application in a Viterbi decoder where current probability or error signals have to be combined with
20 signals derived from previous data periods and selections have to be made based on the amplitude of the signals in possible preceding paths.

In an Optical Disc Player such as a DVD player the physical aperture of the optical system is such that one bit period is much shorter than the total response of the photodiode system so inter-symbol interference occurs. In
25 present laser optic recording there is a minimum number of consecutive "1s" or "0s" that are allowed in the data encoding (d-constraint). This number is currently three, that is in any data sequence must contain a minimum of three consecutive "1s" or three consecutive "0s". This leads to a signal waveform that appears to be band limited but whose peak and trough levels are
30 functions of the number of bits of the same value. The peak achieved with only three successive "1s" will be lower than if there are many successive "1s" (up to seventeen are allowed in the DVD standard). The sequences where only

three successive bits have the same value, that is 01110 and 10001, are known as I3 states. As a result there are a number (in this case twelve, or eight if a symmetrical channel characteristic is assumed) of valid levels that the input signal may have depending on the sequence of bits being received.

- 5 The arrangement described enables the error between the input signal voltage and estimates of the valid values to be obtained and subsequently used to determine the most likely data sequences.

The arrangement may further comprise a current subtractor for forming a probability signal, the probability signal representing the probability that the
10 input signal is a signal of the estimated value, a reference current source being coupled to a first input of the subtractor and the error signal being coupled to a second input of the subtractor, the output of the subtractor providing the probability signal.

In this case where the input signal is compared with a number of
15 estimates or reference levels an output is produced which increases in magnitude the closer the input signal level is to the estimate.

The input signal and the estimated value may both be differential signals, the first and second transconductors both being of differential form.

The arrangement may be such that the positive input signal and positive
20 estimated value are applied to first and second inputs of the first transconductor and the negative input signal and the negative estimated value are applied to first and second inputs of the second transconductor.

This arrangement reduces the need for the two transconductors to have good linearity across the whole of their ranges as it results in the maximum
25 probability condition occurring when the transconductors have zero differential input. As a result only the offset is significant and the linearity is less important.

Each transconductor may comprise a first long tail pair formed by two field effect transistors each having a channel width $W1$ and whose tail current is equal to $I1$ and a second long tail pair formed by two further field effect
30 transistors each having a channel width $W2$ and whose tail current is equal to $I2$, wherein the drain electrodes of the two long tail pairs are cross connected, $I1 > I2$, and $W2 > W1$.

This results in the transconductance being lower in the centre region of the characteristic and rising towards the extremes thus giving an approximation to a square law characteristic.

5 The invention further provides a Viterbi decoder including a plurality of such arrangements.

10 The Viterbi decoding algorithm requires the determination of the magnitude of the errors between the incoming signal levels and the expected valid levels and the tracing of the possible level transitions through the allowable sequence of states. This process requires several manipulations of signals for each sample of input data to obtain certain metric values. These metric values are combined with stored values derived in previous sample periods. The manipulations include modulus subtraction, determination of the maximum of multiple inputs, and multiplication by constants. Further multiple signal paths are required in parallel. This leads to significant bottlenecks in the data flow in digital implementations. The present invention allows the modulus subtraction to be performed in the analogue domain using comparatively simple circuitry that can be easily replicated to create parallel signal processing paths.

20 The above and other features and advantages of the invention will be apparent from and elucidated in the following description, by way of example, of an embodiment of the invention with reference to the accompanying drawings, in which:-

25 Figure 1 shows in block schematic form a Viterbi decoder according to the invention,

Figure 2 shows in block schematic form a path metric processing and storage arrangement for use in the decoder of Figure 1,

Figure 3 shows in block schematic form a circuit arrangement for detecting certain patterns in the input data,

30 Figure 4 shows in block schematic form a first embodiment of a circuit arrangement for producing estimated values of valid input signal values,

Figure 5 shows in block schematic form a second embodiment of a circuit arrangement for producing from differential input signals estimated values of valid input signal values,

Figure 6 is a circuit diagram of a first embodiment of a branch metric processor for producing a path probability signal,

Figure 7 is a circuit diagram of a second embodiment of a branch metric processor for producing a path probability signal,

Figure 8 is a circuit diagram of a path metric processing and storage arrangement, according to the invention,

Figure 9 is a trellis connection diagram showing the required connection for all legitimate data sequences,

Figure 10 shows the corresponding interconnection of the path metric processing and storage arrangements for data having the constraints specified in the present embodiment, and

Figure 11 is a circuit diagram of an alternative path metric and storage arrangement according to the invention.

The Viterbi decoder shown in Figure 1 has in input 1 for receiving an input data signal to be decoded. In this particular example the input data is received from a read head of an optical disc player, for example a CD or DVD player. The input signal may then be passed through an equaliser 2, which may be adaptive. The optionally equalised signal is then sliced by a first data slicer 3 and the sliced signal is fed to a data pattern detector 4. A phase locked loop (PLL) 5 is also connected to the output of the data slicer 3 to derive a symbol rate clock from the received input signal. The output of the PLL 5 feeds a timing generator 6 for generating the clock signals required to synchronise the various elements of the decoder with the input signal. The output of the data-pattern detector is fed to a reference level generator 7 which generates estimates of valid values for the input signal at sampling instants of the signal.

The input signal is also applied to a plurality of branch metric processors 8-1 to 8-n in which the input signal is compared with the estimated valid signal values and a probability function is derived to indicate the

probability that the input signal corresponds with each of the estimated valid values. In the particular example being described there are twelve branch metric processors, that is $n=12$. This is because there are twelve possible signal sequences that are valid. There are, however only eight estimated values which are generated as it is assumed that the middle bit of a sequence such as 11110 will have the same analogue value as the middle bit of the sequence 01111. As a result the same estimated value is input to both branch metric processors which expect input signals of the same value. In other words this embodiment is based on the assumption that the channel response is symmetrical. It would be possible to produce separate estimate for rising and falling signals and thus produce twelve estimated values but this would require two resistor chains and four DACs.

The outputs of the branch metric processors 8-1 to 8-n are fed to respective path metric processing and storage arrangements 9-1 to 9-n. The arrangements 9-1 to 9-n are shown in block schematic form in Figure 2 and comprise a summing circuit 90 to one input of which the output from the respective branch metric processor is connected. It also comprises a comparator 91 having first and second inputs connected to outputs of a trellis network 10 from which selected previous path metric values are connected. The comparator has two complementary outputs 92 and 93 that control two switches 94 and 95. The switches 94 and 95 connect the trellis network outputs to a second input of the summing circuit 90 in such a manner that the larger of the two previous path metric values is connected to the summing circuit 90. The output of the summing circuit 90 may be scaled by a factor K , where $K < 1$. This provides the new path metric value and is stored in a store 96 and then applied to the appropriate input of the trellis 10 in the next symbol period to enable a new updated path metric value to be calculated. The output 94 of the comparator 91 is fed to the input of a Trace-Back Buffer 11 that is clocked at the symbol rate. The output of the Trace-Back Buffer is connected to the output 12 of the decoder and produces the decoded output. The Trace-Back Buffer 11 stores a series of decisions, i.e. the outputs 94 of one of the comparators 91. Starting with either an arbitrary state, or with a state chosen

as having the highest probability, The Trace-Back Buffer 11 traces the possible predecessors of that state by combining the state number at each instant (bit period) with the predecessor decisions stored for that instant so as to arrive at the most likely state at the previous instant (bit period). This is carried out successively for each bit period and results in the determination of a most likely state for an instant in the past. The length of time to the past instant is determined by the bit period and the length of the Trace-Back Buffer in number of stage 1. Provided that the Trace-Back Buffer has sufficient stages it is unimportant which comparator feeds its input since after a sufficient number of stages the output will be the same regardless of which comparator the output is taken from.

Figures 3 and 4 show in greater detail exemplary embodiments of the data pattern detector 4 and reference level generator 7. As shown in Figure 3 the input signal optionally after passing through an equaliser 2 is fed to a first input of the data slicer 3. The output of the data slicer 3 is fed to the PLL 5 which produces a symbol rate clock that is applied to clock inputs of five D-type flip-flops 200 to 204. The flip-flops 200 to 204 are connected as a serial in parallel out shift register. The Q output of each of the flip-flops is connected to a respective input of AND gates 205 and 206. As shown selected ones of the inputs of the AND gates are negated so that AND gate 204 produces an output when the sequence 01110 occurs and the AND gate 205 produces an output when the sequence 10001 occurs. Thus the arrangement shown in Figure 2 produces a logical signal at output 206 when the sequence 01110 occurs and at the output 207 when the sequence 10001 occurs. It would, of course, be possible to modify the arrangement in Figure 2 and still perform the required function. For example, rather than negating selected inputs of the AND gates the \bar{Q} output of the appropriate shift register stages may be connected to the AND gate input.

As shown in Figure 4 the input signal is further applied to second and third data slicers 301 and 302. The data slicer 301 slices the incoming signal at the estimated value for the middle bit of the sequence 01110. Similarly, the

data slicer 302 slices the input signal at the estimated value for the middle bit of the sequence 10001. The output of the second data slicer 301 is fed to the serial input of a shift register formed by three D-type flip-flops 303 to 305 which are clocked by the symbol rate clock derived from the PLL 5. The output of the third data slicer 302 is fed to the serial input of a further shift register formed by three D-type flip-flops 306 to 308 which are also clocked by the symbol rate clock derived from the PLL 5. The Q output of flip-flop 305 is fed to the up/down input of an up/down counter 309 while the output 206 of the data pattern detector is connected to the count input of the up/down counter 309. Similarly, the Q output of flip-flop 308 is fed to the up/down input of an up/down counter 310 while the output 207 of the data pattern detector is connected to the count input of the up/down counter 310. A parallel output of the up/down counter 309 is connected as the digital input to a first digital to analogue converter (DAC) 311, while a parallel output of the up/down counter 310 is connected as the digital input to a second digital to analogue converter (DAC) 312. The outputs of the DACs 311 and 312 are connected to opposite ends of a resistor chain formed by resistors R1 to R7. This gives eight estimates of valid input signal values for the possible sequences of five bits in the input signal. This particular implementation is intended for decoding data from DVD discs where coding restraint mean that the minimum number of successive "1s" in the signal is three and the minimum number of successive "0s" in the signal is also three. This taken together with the assumption that 00001 will produce the same input signal value as 10000 and likewise with other opposite sequences reduces the number of possible valid input signal values to eight.

In operation, the input signal is crudely sliced by the data slicer 3 to obtain an estimate of the data that may contain errors. The slicing level is set by a simple averaging operation based on the knowledge that the mean DC level of the data is zero. The sliced data is then passed to a shift register 200-204 by means of a symbol rate clock derived from the input data using the PLL 5. The five bits in the shift register are monitored by the AND gates 204 and 205 so that when the sequence 01110 or 10001 is present in the shift register

the AND gate 204 or 205 gives an output to indicate that such a sequence has occurred. In order to keep an up to date estimate of the valid signal states, which will vary with input signal amplitudes, caused for example by finger marks on the disc, it is necessary to update the estimate using the signal value
5 when the third bit of the five bit sequence arrived. Clearly it is not known until three symbol periods later that one of these sequences has arrived and it is necessary to be able to retrieve an indication of the signal value three symbol periods earlier. Clearly this could be achieved by providing an analogue signal memory into which a replica of the input signal is entered. This memory would
10 need to be able to store at least three successive analogue samples so that the appropriate input value was available when required to update the estimated value.

An alternative approach used in this embodiment is to provide further data slicers 301 and 302 which slice the input signal at the estimated value for
15 the middle bit of the sequences 01110 and 10001, hereinafter referred to as +ve I3 and -ve I3 data. The outputs of the data slicers 301 and 302 are fed to respective three stage shift registers so that at the output of each shift register a signal is produced to indicate whether the input signal was above or below the estimated value of the middle bit of the I3 data three symbol periods later.
20 The outputs of the shift registers determine the count direction of the up/down counters 309 and 310 and counters 309 is accordingly incremented or decremented if +ve I3 data is detected, while counter 310 is incremented or decremented if -ve I3 data is detected. The count outputs of the counters 309 and 310 are fed to the respective DACs 311 and 312 where they are
25 converted to an analogue voltage which is applied to opposite ends of the resistor chain. The estimated value for the +ve I3 data pattern is derived from the junction of resistors R2 and R3 and is used to define the slicing level of data slicer 301. Similarly, the estimated value for the -ve I3 data pattern is derived from the junction of resistors R5 and R6 and is used to define the
30 slicing level for data slicer 302. These values are also used elsewhere in the decoder as will be apparent from the description with reference to Figures 4 to 6. Clearly the estimated values will increase or decrease by a small step each

time an 13 data pattern is detected but they will remain close to the correct value, provided the counters and DACs have sufficient resolution, a constant input level causing the estimated value to oscillate about the correct value.

While Figures 3 and 4 have described an embodiment in which the given sequence is five bits long this procedure could be applied to data sequences of different length by changing the number of stages in the shift registers and number of inputs of the AND gates. Thus the arrangement shown in Figures 3 and 4 is an example of one embodiment of an arrangement for generating estimates of valid input signal values at sampling instants. It comprises an input 1 for receiving an input signal, a first data slicer 3 for slicing the input signal at a given slicing level, and a detector 204 for detecting a given data sequence in the sliced signal. A second data slicer 301 slices the input signal at a signal value estimated for a given data bit of the given data sequence, and a memory element 304 to 306 stores the output of the second data slicer when slicing the given data bit. Also provided is incrementing means 309. The incrementing means increases the estimated value when the stored output of the second data slicer indicates that the input signal value was above the estimated value when the given data bit was sliced and reduces the estimated value when the stored output of the second data slicer indicates that the input signal value was below the estimated value when the given data bit was sliced.

The arrangement shown in Figures 3 and 4 also comprises a second detector 207 for detecting the inverse of the given data sequence and a third data slicer 302 for slicing the input signal at a signal value estimated for a given data bit of the inverse of the given data sequence. A second memory element 306 to 308 stores the output of the third data slicer when slicing the given data bit of the inverse of the given data sequence. A second incrementing means 310 is also provided. The second incrementing means increases the estimated value when the stored output of the third data slicer indicates that the input signal value was above the estimated value when the given data bit of the inverse of the given data sequence was sliced and reduces the estimated value when the stored output of third data slicer

indicates that the input signal value was below the estimated value when the given data bit of the inverse of the given data sequence was sliced.

In the embodiment shown in Figure 3 the detector comprises a shift register 200 to 204 having a serial input to which the output of the first data slicer is connected and a logic decoder 204 having inputs connected to parallel
5 outputs of the shift register, the logic decoder giving an output 206 indicating the presence of the given data sequence in the shift register.

In the embodiment shown in Figure 4 the memory element comprises a further shift register 303-305 having a serial input to which the output of the
10 second data slicer is connected and a serial output connected to the incrementing means, the incrementing means 309 being enabled by the output of the logic decoder 204.

As shown in Figure 3 the first and second detectors comprise a common shift register 200-204 having a serial input to which the output of the
15 first data slicer is connected and a logic decoder 204,207 having inputs connected to parallel outputs of the shift register, the logic decoders producing outputs 206,207 indicating the presence of the given or inverse data sequence in the shift register.

As shown in Figure 4 the first 309 or each of first 309 and second 310
20 incrementing means comprises an up/down counter which is clocked by the output of the respective detector 204,207 and whose count direction is determined by the state of the respective memory element 303-305,306-308 and a digital to analogue converter (DAC) 311,312 whose output determines the estimated signal value.

25 In the embodiment shown in Figure 4 the estimated values are derived from tapping points 321-328 on a resistor chain R1-R7, the outputs of the DACs 311,312 being applied to opposite ends of the resistor chain.

As an alternative it would be possible to provide a logic decoder for all the permissible 5-bit codes that would increment a separate up/down counter
30 for each of the permissible code sequences. Separate data slicers for slicing the input signal at the estimated values for each of the permissible code sequences and separate three stage shift registers would be provided. The

output of each of the shift registers would control the count direction of the respective up/down counter, the respective logic decoder causing the relevant counter to count. A DAC would receive the counter output for each permissible code sequence, the outputs of the DACs providing directly the estimated values for each of the sequences. This would enable any asymmetry of the channel to be compensated but would require more complex circuitry.

Figure 5 shows in block schematic form a modification of the embodiment shown in Figure 3 that is adapted to process differential input signals. Those elements in Figure 5 corresponding to elements in Figure 3 have been given the same reference signs. As shown in Figure 5 two further data slicers 331 and 332 are provided together with associated shift registers formed by D-type flip-flops 333, 334, and 335 and 336, 337, and 338, respectively. Two selection circuits 340 and 341 are provided which select the output of the appropriate shift register for application to the up/down input of the counters 309 and 310. The selection circuits also each receive the outputs 206 and 208 of the pattern detectors 205 and 207 and the symbol rate clock. As will be seen from Figure 5 the positive differential signal is applied to data slicers 301 and 302 while the negative differential signal is applied to the data slicers 331 and 332.

In operation, when a positive I3 data pattern is detected the selectors 340 and 341 receive a signal from the detector output 206 (Figure 3). This causes the Q output of flip-flop 305 to be connected to the up/down input of the counter 309 and the Q output of flip-flop 308 to be connected to the up/down input of counter 310. At the same time the detector output also causes the counters 309 and 310 to increment by one count in the direction determined by respective Q output. A similar process takes place when a negative I3 pattern is detected when the selectors receive a signal from detector output 208 (Figure 3), but in this case the Q output of flip-flop 335 is connected to the up/down input of counter 309 while the Q output of flip-flop 338 is connected to the up/down input of counter 310. It will be appreciated that the taps on the resistor chain have a symmetrical structure and hence a differential estimate can be derived for processing by the branch metric

processors 8-1 to 8-n. An alternative approach is to provide two arrangements as shown in Figure 4 and to derive the differential estimated values from the two resistor ladders. This would have some performance advantages where the transmission channel is asymmetric.

5 All the arrangements for generating estimates described using resistor ladders for interpolating intermediate values may be provided with a plurality of resistor ladders which may be designed to take into account the different disc characteristics, that is CD, DVD, CD recordable, etc. The particular resistor ladder to be used would be switched into circuit in response to the detection or
10 selection of a particular type of disc to be read.

Figure 6 shows a first embodiment of the branch metric processor 8. The first stage in the determination of branch metric values is to compare the incoming signal values with estimated values of the allowable signal. The estimated values may be obtained as described with reference to Figures 2
15 and 3. In classical definitions of the Viterbi algorithm the squared error between the signal and each reference value is computed. In most practical implementations, however, the squaring is replaced by a modulus subtraction operation with little impact on the overall algorithm. In this embodiment the modulus subtraction is applied but instead of computing an error term a signal
20 related to the probability that the incoming signal should be interpreted as being at a certain valid state is generated. Therefore, if when the input signal is compared with one of the reference values it is at or very close to that value then the output will be a maximum while it will be low if the input signal differs significantly from that the reference value.

25 The embodiment shown performs this operation using differential input signals. It will be noted that the reference values have a symmetrical structure. A single ended arrangement could, however, be used.

As shown in Figure 6 the branch metric processor comprises a first differential input 401 and 402 connected to the gate electrodes of two p-
30 channel field effect transistors T1 and T2. The source electrodes of transistors T1 and T2 are connected via a current source 403 to a supply rail V_{DD} . The drain electrode of transistor T1 is connected via the drain-source path of an n-

channel field effect transistor T3 to a supply rail V_{SS} while the drain electrode of transistor T2 is connected via the drain-source path of an n-channel transistor T4 to the supply rail V_{SS} . The gate and source electrodes of transistor T3 are commoned, as are the gate and source electrodes of transistor T4. A second differential input 404 and 405 is connected to the gate electrodes of two further p-channel field effect transistors T5 and T6. The source electrodes of transistors T5 and T6 are connected via a current source 406 to the supply rail V_{DD} . The drain electrode of transistor T5 is connected via the source-drain path of an n-channel field effect transistor T7 to the supply rail V_{SS} , while the drain electrode of transistor T6 is connected via the drain-source path of an n-channel field effect transistor T8. The gate electrode of transistor T3 is connected to the gate electrode of transistor T7 while the gate electrode of transistor T4 is connected to the gate electrode of transistor T8.

The junction of transistors T5 and T7 is connected to the source electrode of an n-channel field effect transistor T9 while the junction of transistors T6 and T8 is connected to the source electrode of an n-channel field effect transistor T10. The drain electrodes of transistors T9 and T10 are connected to an output 407 and via a current source 408 to the supply rail V_{DD} . The gate electrodes of transistors T9 and T10 are connected to a bias potential V_{bias} . Respective clamp diodes D1 and D2 are connected between the source electrodes of transistors T9 and T10 and the supply rail V_{SS} . It will be appreciated that the arrangement shown in Figure 6 comprises two transconductors whose outputs are subtracted to perform a modulus subtraction.

The result to be derived is

$$BM_k = |(xp_k - xn_k) - (rp - rn)| \quad (1)$$

Where xp_k and xn_k are the positive and negative input signal values at time instant k, and rp and rn are the symmetrical reference values.

If equation 1 is implemented directly then the two transconductors must have good linearity across the whole signal range. This is because if both the

bracketed signals are large but of the same magnitude this represents the minimum error or maximum probability.

Equation 1 can, however be rearranged as follows;

5
$$BM_k = |(xp_k - rp) - (xn_k - rn)| \quad (2)$$

This makes the maximum probability condition occur at the points where the transconductors have zero (or minimum) differential input and consequently only the offset is significant and the linearity is less important.

10 At first sight, this rearrangement implies no common mode rejection for the differential inputs, as the differential signals are not applied to differential inputs of the transconductors. If the bandwidth and accuracy of the current subtraction are good, however, some common mode rejection will occur as a result of the subtraction.

15 It will be appreciated that the result of equations (1) and (2) is the error signal and this is what is produced at the drain electrodes of transistors T7 and T8. In order to obtain a signal related to the probability the error signal is subtracted from the current produced by the current source 408 to produce an output signal equal to $(1 - \text{error signal})$.

20 A modification of the branch metric circuit shown in Figure 6 (and also to that shown in Figure 7) is required for the branch metric circuits used at each end of the amplitude range. That is because if noise spikes cause the input signal value to exceed the extreme estimated levels then no branch metric circuit will give a high probability for the input signal level. That is if the
25 level for a long series of '1s' or '0s' is exceeded the branch metric circuits will not indicate the high probability that the input signal level represents one of that series of '1s' or '0s'. In order to enable these branch metric circuits, i.e. circuits 8-1 and 8-n to indicate a high probability under these circumstances one of the transistors T9 or T10, depending on which end of the amplitude
30 range it is processing, is connected directly to the supply rail Vdd while the other is connected to the output 407 and current source 408.

With the circuit shown in Figure 6 the result is, in essence, an error term that is linearly proportional to the true error, albeit modified by the transconductor linearity. The circuit uses simple differential pairs of low transconductance and consequently the sensitivity is at a maximum near to the minimum error condition. This is the reverse of the ideal situation. Some improvement can be obtained by modifying the transconductance characteristic to have a low value at the minimum error condition and Figure 5 is a circuit diagram of an arrangement in which the transconductance characteristic has been modified in such a manner.

In Figure 7 those elements corresponding to elements in Figure 6 have been given the corresponding reference signs. The circuit shown in Figure 7 includes two additional p-channel field effect transistors T11 and T12 whose source electrodes are connected to the supply rail V_{DD} via a current source 410. The drain electrode of transistor T11 is connected to the drain electrode of transistor T2 while the drain electrode of transistor T12 is connected to the drain electrode of transistor T1. The gate electrode of transistor T11 is connected to input 401 while the gate electrode of transistor T12 is connected to input 402. In addition the circuit includes two more additional p-channel field effect transistors T13 and T14 whose source electrodes are connected to the supply rail V_{DD} via a current source 411. The drain electrode of transistor T13 is connected to the drain electrode of transistor T6 while the drain electrode of transistor T14 is connected to the drain electrode of transistor T5. The gate electrode of transistor T14 is connected to input 405 while the gate electrode of transistor T13 is connected to input 404. The currents produced by the current sources 403 and 406 are equal to I_1 while those produced by current sources 410 and 411 are equal to I_2 . The channel width of transistors T1, T2, T5, and T6 is equal to W_1 and the channel width of transistors T11, T12, T13, and T14 is equal to W_2 . By making $I_1 > I_2$ and $W_2 > W_1$ the transconductance is made lower in the centre region of the characteristic and rises towards the edges. In this way an approximation to a squared error function can be obtained.

Figure 8 is a circuit diagram of a path metric processing and storage circuit suitable for use in the decoder of Figure 1 and that corresponds to the schematic diagram in Figure 2. It has two inputs, 901 and 902, which are connected to appropriate outputs of the trellis network 10. The input 901 is connected to a first input of a comparator 903, to the drain electrode of an n-channel field effect transistor T900 and to the gate electrode of a further n-channel field effect transistor T901. The input 902 is connected to a second input of the comparator 903, to the drain electrode of an n-channel field effect transistor T902 and to the gate electrode of a further n-channel field effect transistor T903. The drain electrodes of transistors T901 and T903 are connected to a supply rail V_{DD} while their source electrodes are connected via a current source 904 to a supply rail V_{SS} . The gate electrodes of transistors T900 and T902 are connected via the current source 904 to the supply rail V_{SS} and to the gate electrode of a further n-channel field effect transistor T904. A p-channel field effect transistor T905 has its source electrode connected to the supply rail V_{SS} and its gate and drain electrodes connected to the drain electrode of transistor T904. A further input 905 is connected to the gate and drain electrodes of an n-channel field effect transistor T906 and to the gate electrode of an n-channel field effect transistor T907. The source electrodes of transistors T904, T906, and T907 are connected to the supply rail V_{SS} . The drain electrode of transistor T904 is connected to the drain electrode of transistor T907. The gate electrode of transistor T905 is connected via a first switch S900 to a first capacitor C900 and via a second switch S901 to a second capacitor C901. The other sides of the capacitors C900 and C901 are connected to the supply rail V_{DD} . The source electrodes of two p-channel field effect transistors T908 and T909 are connected to the supply rail V_{DD} . The gate electrodes of transistors T908 and T909 are connected to the first capacitor C900 via a switch S902 and to the second capacitor C901 via a switch S903. The drain electrode of transistor T908 is connected to an output 906 while the drain electrode of transistor T909 is connected to an output 907.

The path metric processing stage shown in Figure 8 takes the branch metric l_{bmk} , that is the output current produced at the output 407 of Figure 6

or Figure 5 and adds it to the largest of the path metrics $pma(k-1)$ and $pmb(k-1)$ stored from previous states and applied to inputs 901 and 902 via the trellis network 10. That is the circuit shown in Figure 7 performs a compare and select function on the two previous state path metrics and then adds to the present branch metric to the selected previous state path metric to form an updated state path metric. The comparison and selection functions are performed by a simple four transistor source follower and mirror arrangement formed by transistors T900 to T903. As current is forced into inputs 901 and 902 the mirror drain voltages increase, that is the drain voltages of transistors T900 and T902, but the source followers, transistors T901 and T903, will pull the gates of transistors T900 and T902 to the value needed by the transistor passing the largest current. Hence the output transistor T904 will replicate the largest of the currents supplied, that is the one from the previous path having the highest probability. It should be noted that this circuit could be expanded to provide more than two inputs and will select the largest of those inputs.

The addition function is performed by adding the currents passed by transistors T904 and T907. As has previously been described transistor T904 replicates the larger of the two path metric currents produced in the previous sampling period while input 905 is fed with the branch metric current for the present sampling period. This current is replicated in transistor T907. The summed current is sensed by the diode connected transistor T905 and stored in a current memory whose output is available at outputs 906 and 907. Two phase sampling is used in the current memory to ensure that the previous state path metric is available for output to the connection trellis while the present state processing takes place. That is, when switches S901 and S903 are closed an output current determined by the charge on capacitor C900 will be available and the capacitor C901 will be charged to the gate potential of transistor T905 which will depend on the sum of the currents in transistors T904 and T907. At the end of the present sampling period switches S901 and S903 open while switches S900 and S902 close causing the current state path metric to be stored and fed to outputs 906 and 907 for connection to the connection trellis for processing in the next sample period. A simple width

scaling may be applied to the output transistors T908 and T909 to ensure that the accumulated results have an inherent decay to prevent signal levels expanding out of range.

The drain voltages of transistors T900 and T902 are applied to inputs of a comparator 903 and the assumed bit values are derived from its output and as shown in Figure 1 applied to the input of the Trace-Back Buffer from whose output a serial data stream can be taken. If the length of the Trace-Back Buffer is made sufficiently long it is immaterial which of the path metric processor outputs is applied to the register input.

Figure 11 shows a circuit diagram of a modification of the path metric processing and storage circuit shown in Figure 8 and corresponding elements therein have been given corresponding reference signs. As a full description of the circuit shown in Figure 8 has already been given the description of Figure 11 will concentrate only on the differences between the circuits of these two Figures.

The circuit shown in Figure 11 is provided with an additional current source 910 connected in series with the drain-gate path of an n-channel field effect transistor T910 between the supply rails Vdd and Vss. The gate electrode of transistor T910 is connected to the gate electrode of transistors T900 and T902. The junction of the current source 910 and transistor T910 is connected to the input of an inverting amplifier 911 whose output is connected to the input of an inverter 912. An n-channel field effect transistor T911 has its drain electrode connected to the supply rail Vdd, its source electrode connected to the input of amplifier 911 and its gate electrode connected to the output of the amplifier 911. A p-channel field effect transistor T912 has its drain electrode connected to the supply rail Vss, its source electrode connected to the input of the amplifier 911 and its gate electrode connected to the output of the amplifier 911. The output of the inverter 912 is connected to an input of a NORgate 913 whose output controls the operation of two switches S904 and S905. The switch S904 is connected between the drain electrode of transistor T908 and a current sink 914, the other end of which is connected to the supply rail Vss. Similarly the switch S905 is connected

between the drain electrode of transistor T909 and a current sink 915, the other end of which is connected to the supply rail Vss.

As will be apparent the main difference between the circuit described with reference to Figure 11 and that described with reference to Figure 8 is in the method used to prevent signals from expanding out of range. As described with reference to Figure 8 this is achieved by making the gain less than one by appropriate dimensioning of transistors and in the present case it is achieved by subtracting a constant value from the output current whenever the output currents produced by all the path metric processing circuits exceeds a given value. This is achieved using the circuit shown in Figure 11 as follows.

The arrangement comprising transistors T911 and T912 and the amplifier 911 forms a current comparator whose output goes high if the current through transistor T912 is greater than I_{dec} , the current produced by current source 910. Thus the output of the inverter 912 goes low and this output is fed to one input of the NORgate 913. Each path metric processing and storage arrangement includes such an arrangement and feeds a respective one of the inputs of the NORgate 913.

The output of the path metric processing and storage arrangement is modified by providing switches S904 and S905 which connect the drain electrodes of transistors T908 and T909 to the supply rail Vss via respective current sinks 914 and 915 which each sink a current I_{dec} . The switches S904 and S905 are controlled by the output of the NORgate 913 and are closed when that output goes high. This occurs when the path metric current in all of the arrangements is greater than I_{dec} . That is the smallest path metric current is greater than I_{dec} . Under these circumstances I_{dec} is subtracted from the outputs of all of the path metric processing arrangements to prevent the currents from increasing out of range.

The present embodiment has been designed to decode data receive from optical discs and in the case of DVD discs there are certain constraints on the form in which the data is encoded and stored on the disc. In particular it is defined that the minimum run length is three bits, that is the minimum number of successive "1s" is three and so is the minimum number of successive "0s" or

-1s". This reduces the number of different permitted sequences of five bits to twelve rather than thirty two. It will be clear to the skilled person that the number of sequences will be dependent on the coding conditions and that the present embodiment illustrates one particular condition and that appropriate
5 modifications to the number of paths could be made to decode data using different coding conditions

The trellis connection diagram shown in Figure 9 illustrates the possible valid state transitions from sample to sample. In Figure 9 the twelve permitted sequences are listed in the centre column and the corresponding five bit
10 sequences shown in the left hand column. In this diagram, incoming bits are represented at the left of the state description. Time steps proceed from left to right and the vertical array of nodes represent the possible states at each sample (or bit) period. The permissible states are defined by the sequences of five consecutive bits as illustrated in the left hand column. It will be apparent
15 that with some states it is possible to move to one of two different states in the next bit period while for other states it is possible only to move to one state. Similarly, some states can only follow one previous state while other states can be arrived at from one of two previous states.

Figure 10 shows the interconnection of twelve path metric processing
20 and storage arrangements to implement the connection trellis shown in Figure 9. As will be seen from Figure 10 each of the path metric processing and storage arrangements 9-1 to 9-12 receives an input signal bm_1 to bm_{12} from the corresponding branch metric processor 8-1 to 8-12. The arrangement 9-1 receives a first path metric input from a first output of the arrangement 9-1 and
25 a second path metric input from a first output of the arrangement 9-2. The path metric inputs are those processed and stored in the previous bit period and the branch metric value for the present bit period is added to the largest of the path metric signals and stored for use in the next bit period. As will be apparent from Figure 10 some of the path metric processing and storage
30 arrangements have only one input and/or one output connected. This arises when there is only one permissible predecessor and/or successor state. As will be apparent, in order to calculate the path metric for the current bit period it is

necessary to add the appropriate branch metric for the current bit period to the largest of the path metrics in the previous bit period. Thus the calculated path metrics are stored in the arrangements 9-1 to 9-12 so that they are available at the outputs for application to the inputs of the arrangements 9-1 to 9-12 at the start of the next bit period.

Clearly if differently encoded data having different coding constraints and different sequence lengths affecting inter symbol interference are taken into account the number of trellis paths and path metric processors will be modified accordingly.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known to arrangements for selecting the largest of a number of input signals and to Data decoders including such arrangements and parts thereof and which may be used instead of or in addition to features already described herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present application also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation of one or more of those features which would be obvious to persons skilled in the art, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features and/or combinations of such features during the prosecution of the present application or of any further application derived therefrom.

CLAIMS

1. An arrangement for selecting the largest of a plurality of input
5 currents and adding a further current to the selected current, the arrangement
comprising: a plurality of inputs for receiving said input currents; a further input
for receiving said further current; an output for delivering an output current
proportional to the sum of the largest of the input currents and the further
current; means for feeding each of the received input currents to the main
10 current conducting path of a respective transistor, each of the transistors
having its control electrode connected to a common point; a respective
follower transistor connected between the input and the common point; a
mirror transistor having its control electrode connected to the common point for
producing a current whose value is related to that of the largest input current; a
15 summing arrangement for adding the largest of the input currents or a current
proportional thereto to the further current or a current proportional thereto,
said summing arrangement having a first input for receiving the current from
the mirror transistor, a second input for receiving the further current, and an
output; and means for coupling the output of the summing arrangement to the
20 output of the arrangement.

2. An arrangement as claimed in Claim 1 in which the transistors
are field effect transistors.

25 3. An arrangement as claimed in Claim 1 or Claim 2 including
indication means for indicating which of the plurality of inputs is the largest.

4. An arrangement as claimed in Claim 3 in which the plurality is
two wherein the inputs are connected to respective inputs of a comparator
30 whose output indicates which of the inputs is the larger.

5. An arrangement as claimed in any preceding claim including a current sensing and reproduction arrangement coupled between the output of the summing arrangement and the output of the arrangement.

5 6. An arrangement as claimed in Claim 5 in which the output of the summing arrangement is sensed and stored in one sample period and reproduced in a subsequent sample period.

7. An arrangement as claimed in Claim 6 in which the current
10 sensing and reproduction arrangement comprises an input coupled to a first diode connected field effect transistor, a second field effect transistor, a capacitor connected across the diode connected transistor via a first switch, means for feeding the output of the summing arrangement to the input, a second switch connected between the capacitor and the gate electrode of the
15 second transistor, and an output coupled to the drain electrode of the second transistor, wherein the first switch is closed during the one sample period and the second switch is closed during the subsequent sample period.

8. An arrangement as claimed in Claim 7 in which the dimensions
20 of the first and second transistors are chosen so that the current reproduced by the second transistor is less than that sensed by the first transistor by a desired factor.

9. An arrangement as claimed in Claim 7 or Claim 8 comprising a
25 second capacitor connected across the first transistor via a third switch and a fourth switch connected between the second capacitor and the gate electrode of the second transistor wherein the third switch is closed during the subsequent sample period and the fourth switch is closed during the one sample period.

30

10. An arrangement as claimed in any of Claims 5 to 7 or in Claim 9 when dependent on Claim 7 comprising a comparator for determining when

the largest of the input currents is greater than a predetermined value and producing an output indicative thereof and means for subtracting the predetermined value from the output current.

5 11. A plurality of arrangements as claimed in Claim 10 wherein the comparator outputs are connected to respective inputs of a logic arrangement which produces an output to cause the subtracting means to be operative only when the largest input current to all the plurality of arrangements is greater than the predetermined value.

10 12. An arrangement as claimed in any of Claims 7 to 11 in comprising a third transistor having its gate electrode connected to the gate electrode of the second transistor and its drain electrode connected to a second output of the arrangement.

15 13. An arrangement for selecting the largest of a plurality of input currents and adding a further current to the selected current the arrangement being substantially as described herein with reference to Figure 8 of the accompanying drawings.

20 14. A Viterbi decoder comprising a trellis network interconnecting a plurality of arrangements as claimed in any preceding claim, the plurality of inputs to each of the arrangements being derived from outputs of one or more of the arrangements as defined by the connection trellis, a corresponding
25 plurality of probability signal generators for generating a probability signal indicating the probability that a received signal corresponds to a valid signal value, the outputs of the probability signal generators being fed to the respective further inputs of the arrangements, wherein at least one of the arrangements includes indicating means for indicating which of the plurality of
30 inputs is the largest and the indicating means is connected to a serial in serial out shift register whose output provides the decoded data.

15. A Viterbi decoder substantially as described herein with reference to the accompanying drawings.

5 16. Any novel feature or any novel combination of features disclosed herein either explicitly or implicitly whether or not it relates to the same invention as that claimed in any preceding claim.

ABSTRACT

DATA DECODING

5 An arrangement for selecting the largest of a plurality of input currents (pma (k-1), pmb (k-1)) and adding a further current (Ibm_k) to the selected current, the arrangement comprising: a plurality of inputs (901, 902) for receiving said input currents; a further input (905) for receiving said further current; an output (906, 907) for delivering an output current proportional to the
10 sum of the largest of the input currents and the further current; means for feeding each of the received input currents to the main current conducting path of a respective transistor, (T900, T902) each of the transistors having its control electrode connected to a common point; a respective follower transistor (T901, T903) connected between the input and the common point; and a
15 mirror transistor (T904) having its control electrode connected to the common point for producing a current whose value is related to that of the largest input current.

 The currents through transistors (T904, T907) are summed and sensed by a diode connected transistor (T905) whose gate voltage is stored on a
20 capacitor (C900, C901) by means of respective switches (S900, S901). The voltages across the capacitors (C900, C901) are fed via respective switches (S902, S903) to the gate electrodes of transistors (T908, T909) whose drain electrodes feed an output current (pmc (k-1)) to outputs (906, 907) of the arrangement.

25 A plurality of such arrangements are used for producing path metric currents for a Viterbi decoder.

(Figure 8.)

THIS PAGE BLANK (USPTO)

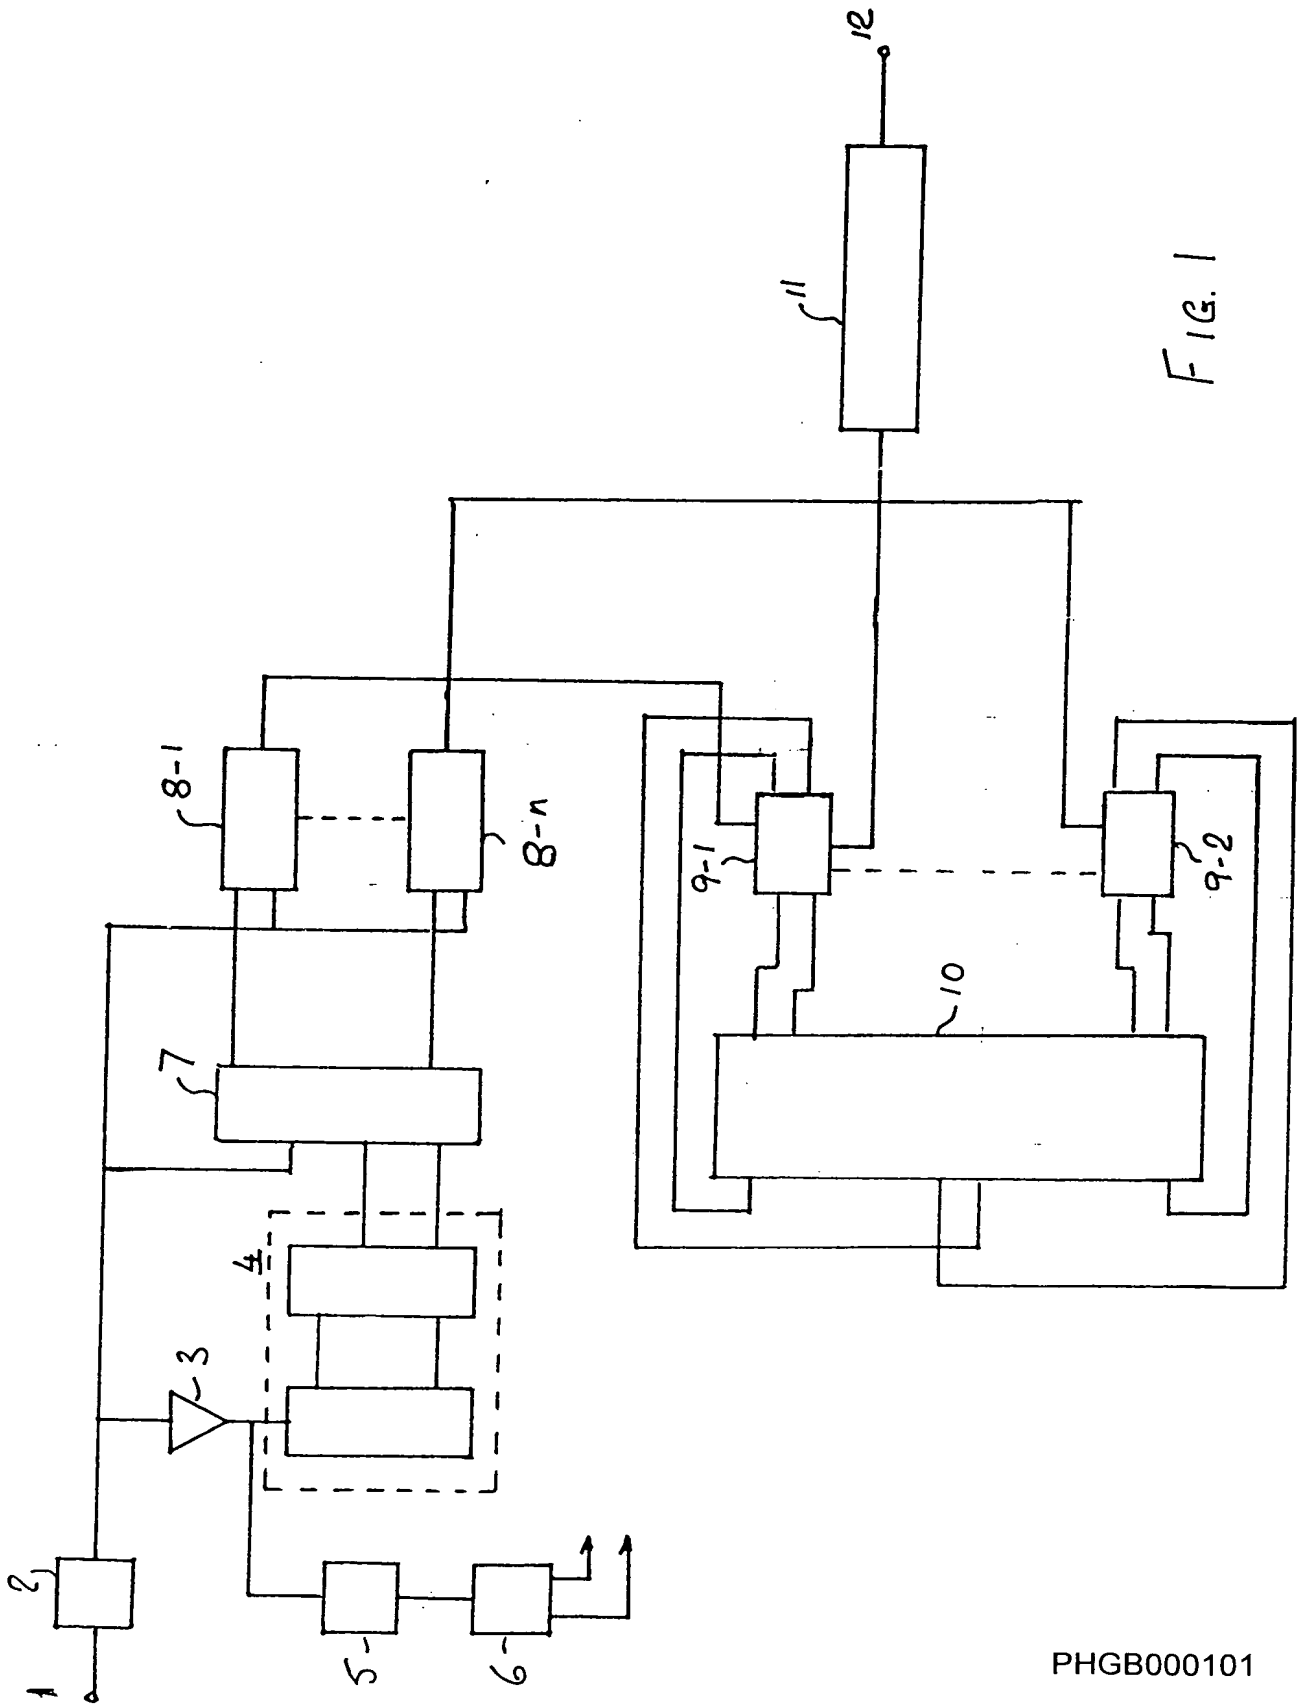


FIG. 1

THIS PAGE BLANK (USPTO)

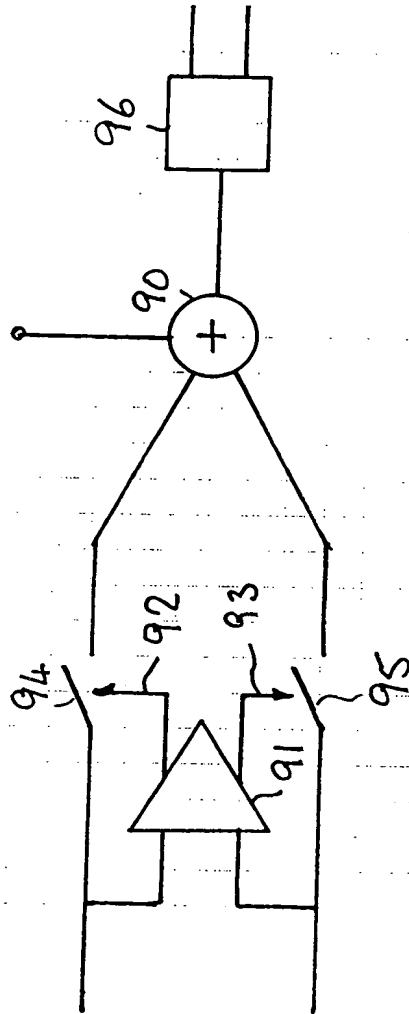


FIG. 2

THIS PAGE BLANK (USPTO)

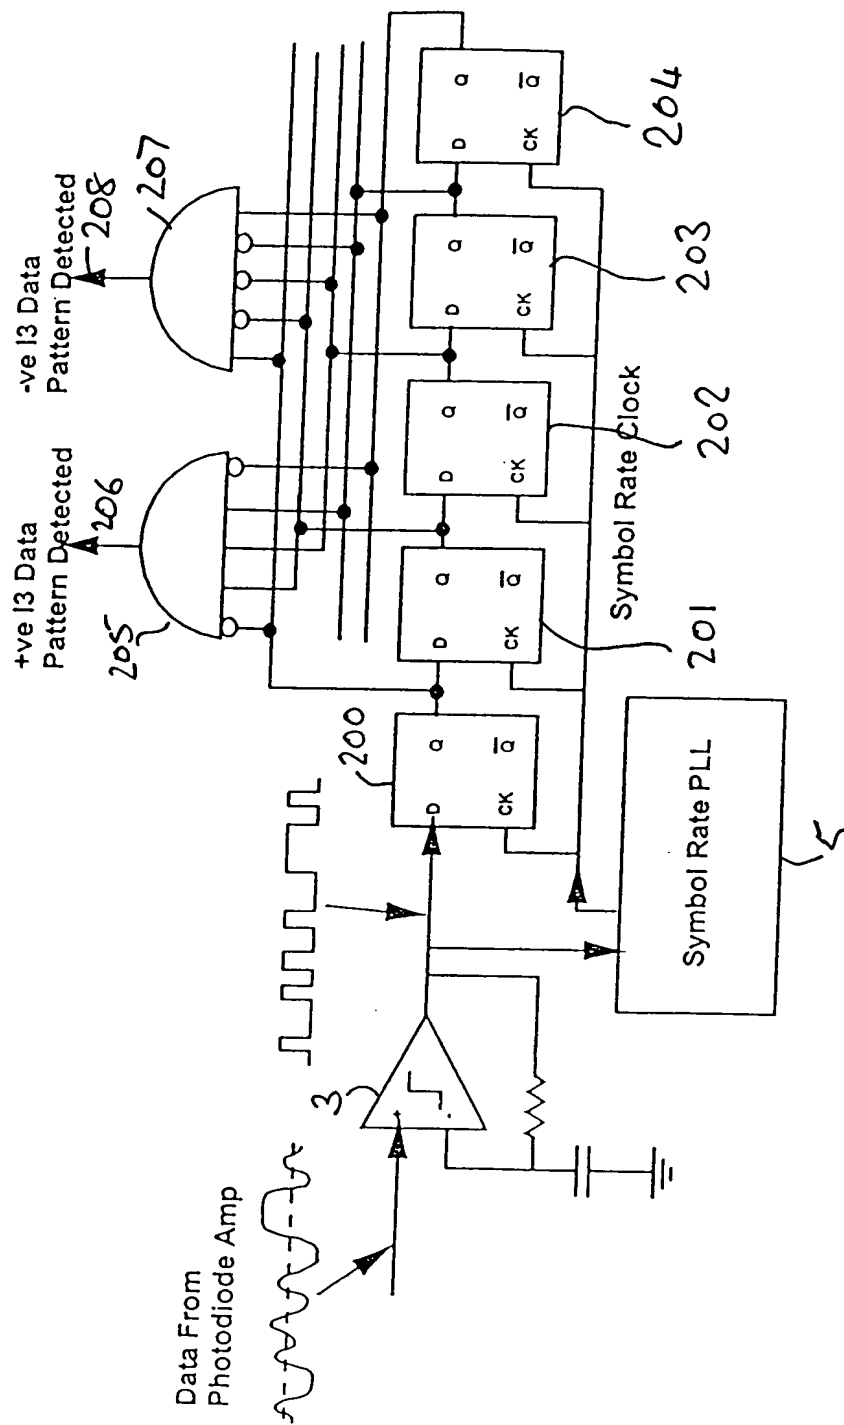


FIG. 3.

THIS PAGE BLANK (USPTO)


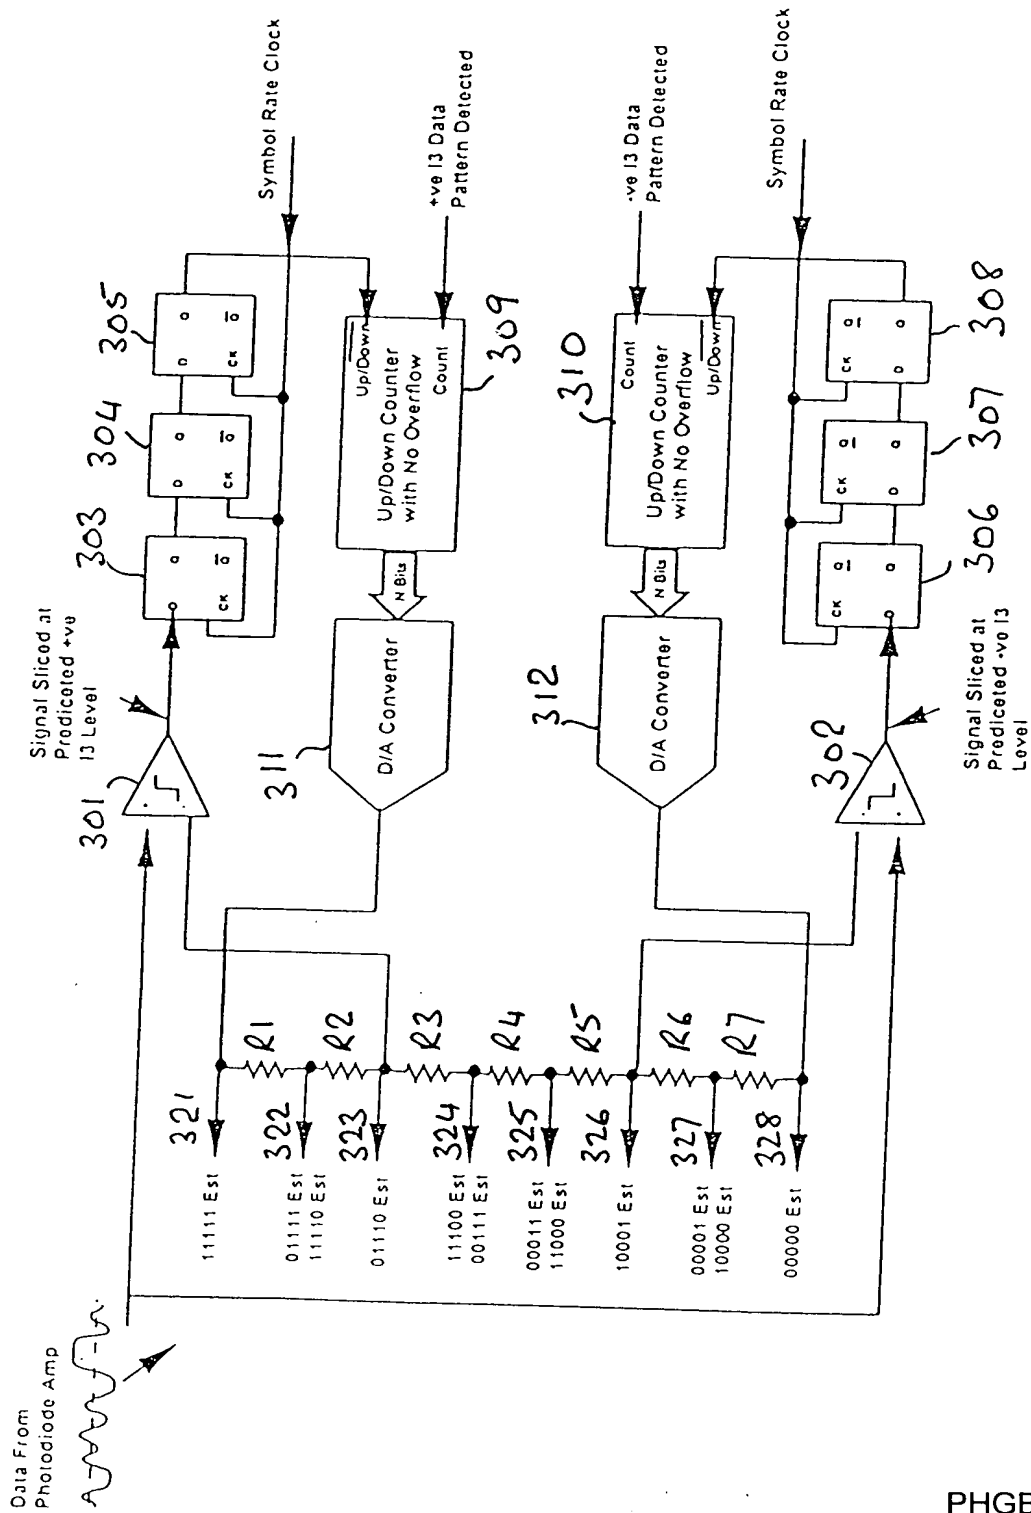


FIG 4

THIS PAGE BLANK (USPTO)

5/11

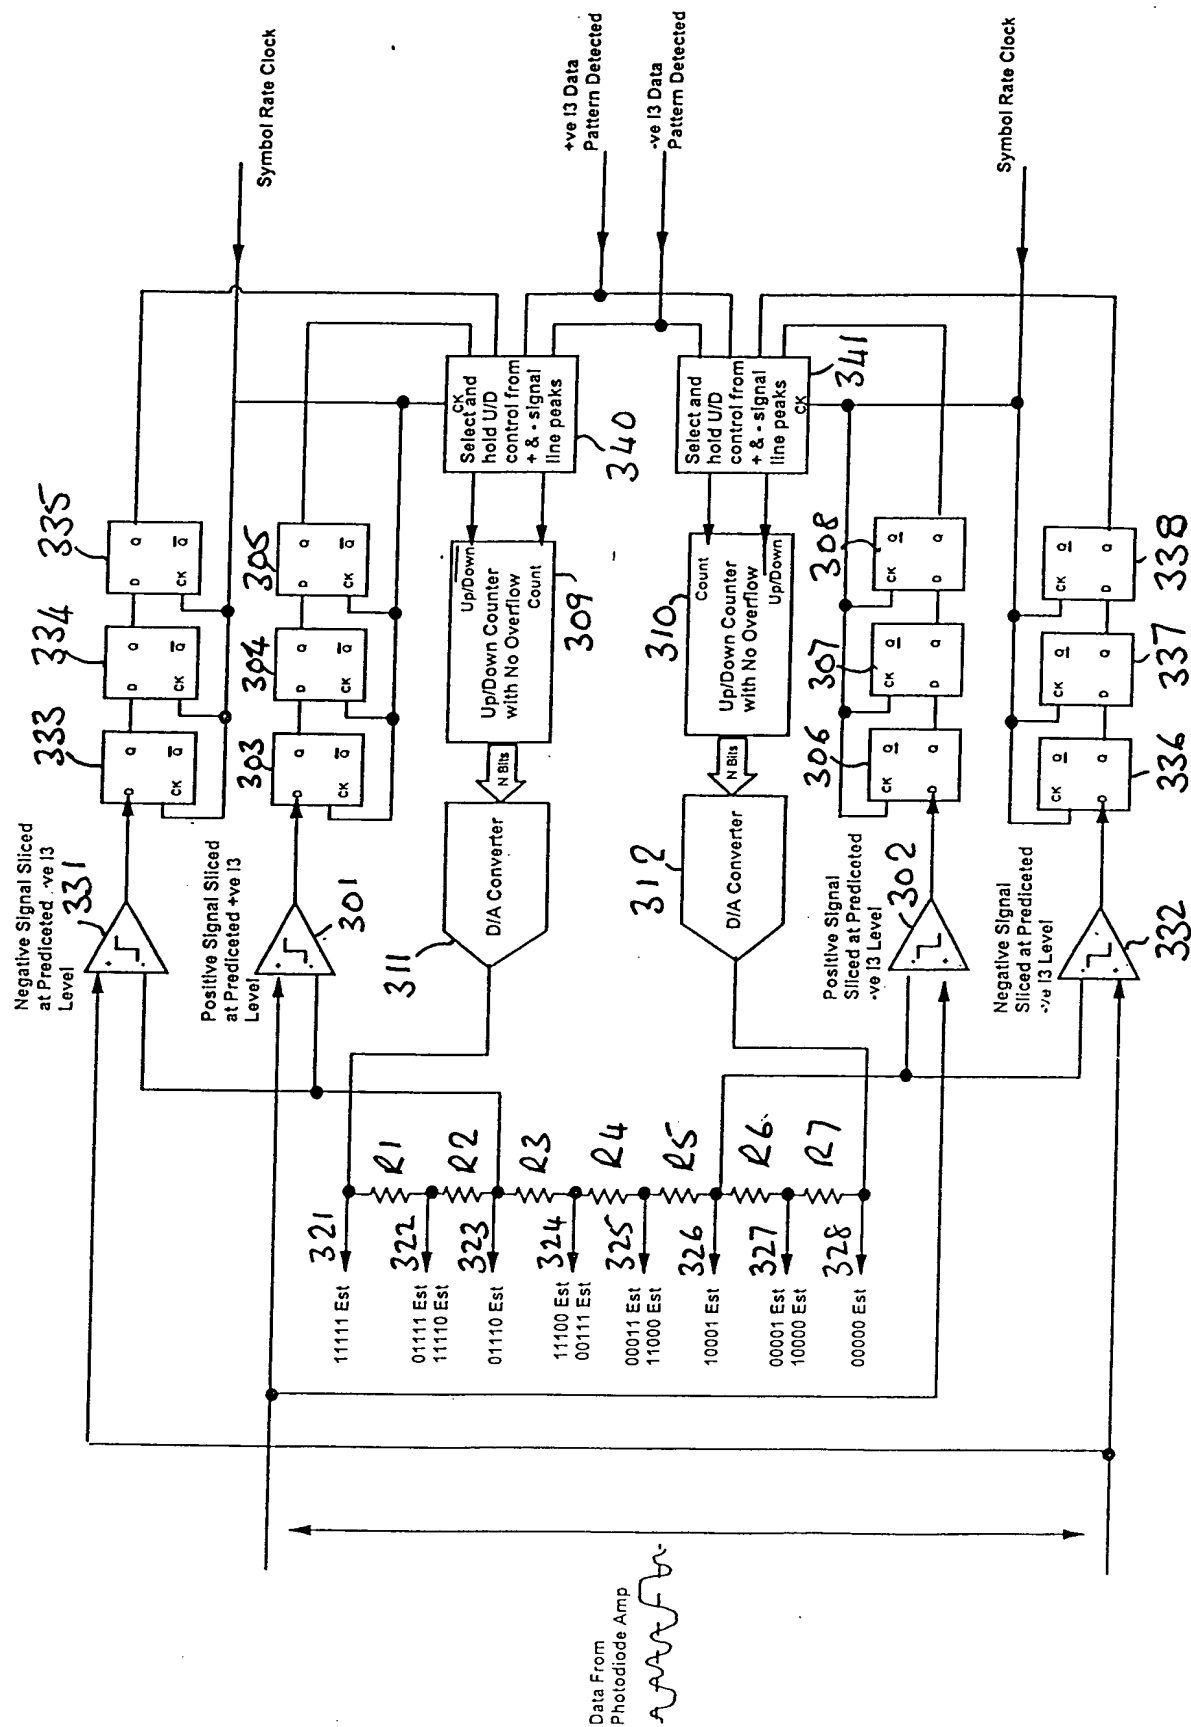

THIS PAGE BLANK (USPTO)

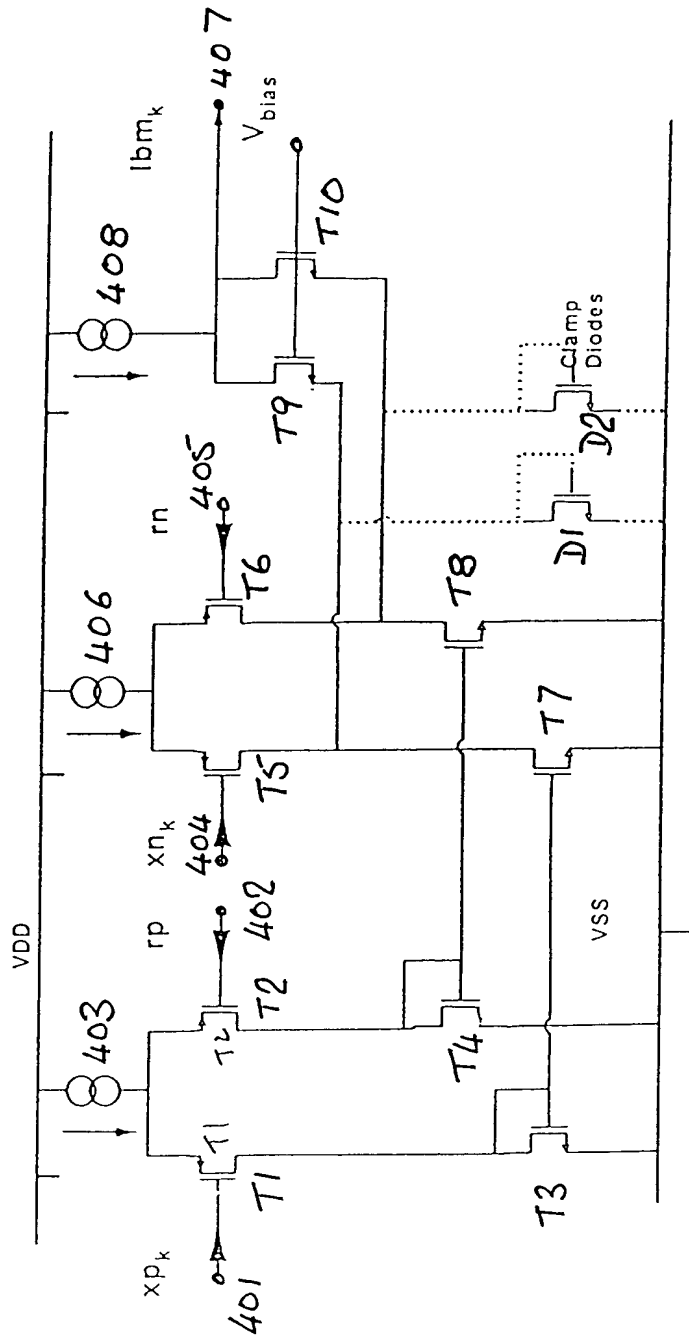


FIG. 6

THIS PAGE BLANK (USPTO)


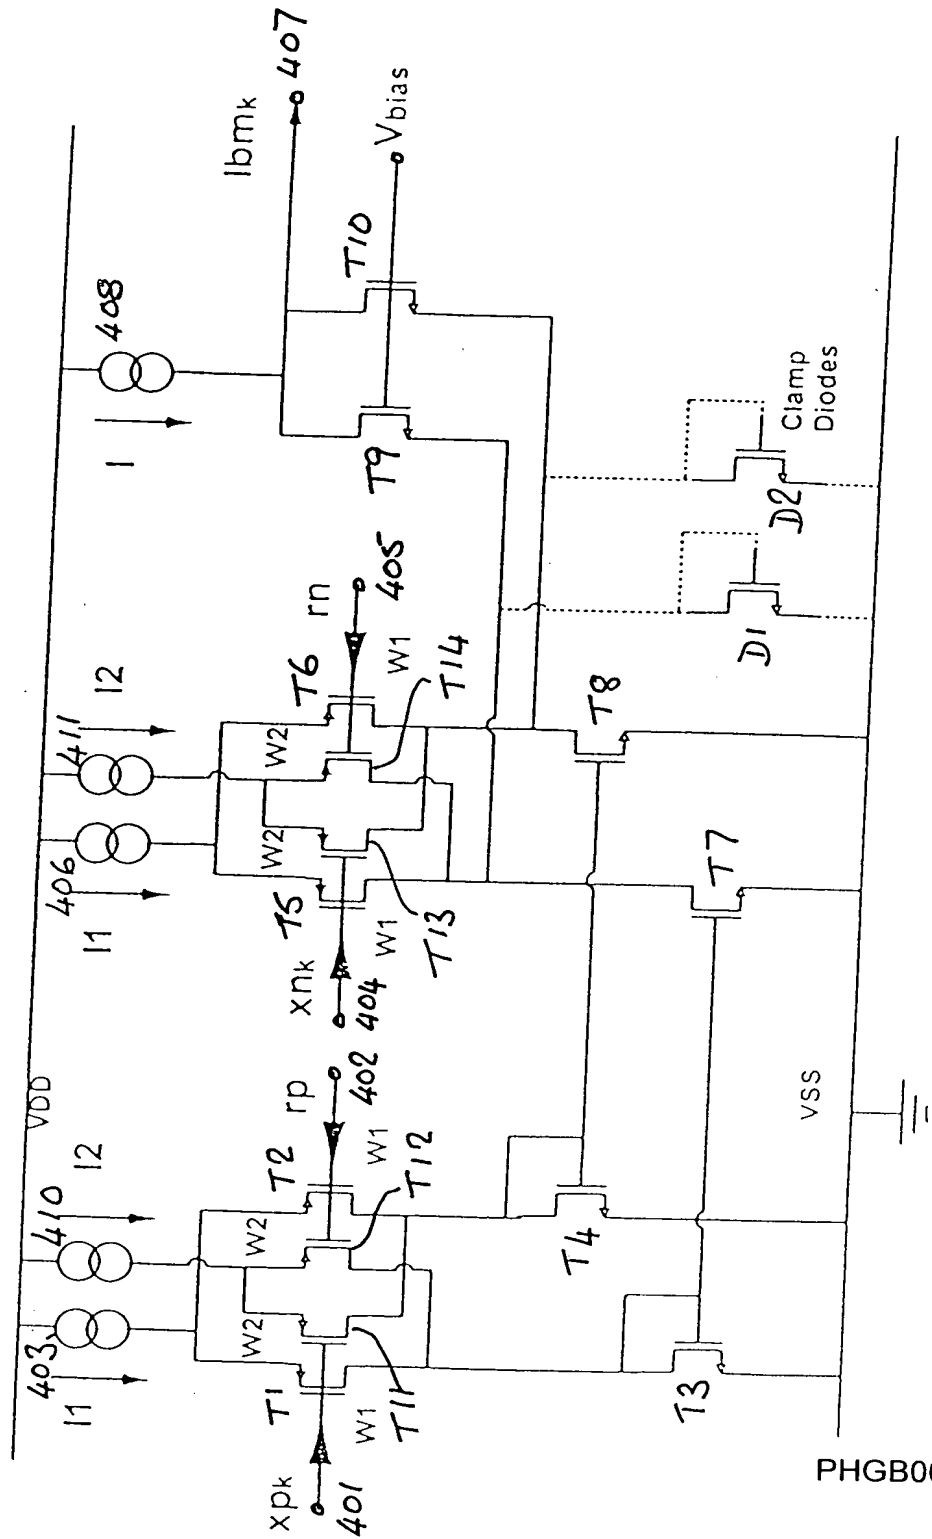


FIG 7

THIS PAGE BLANK (USPTO)

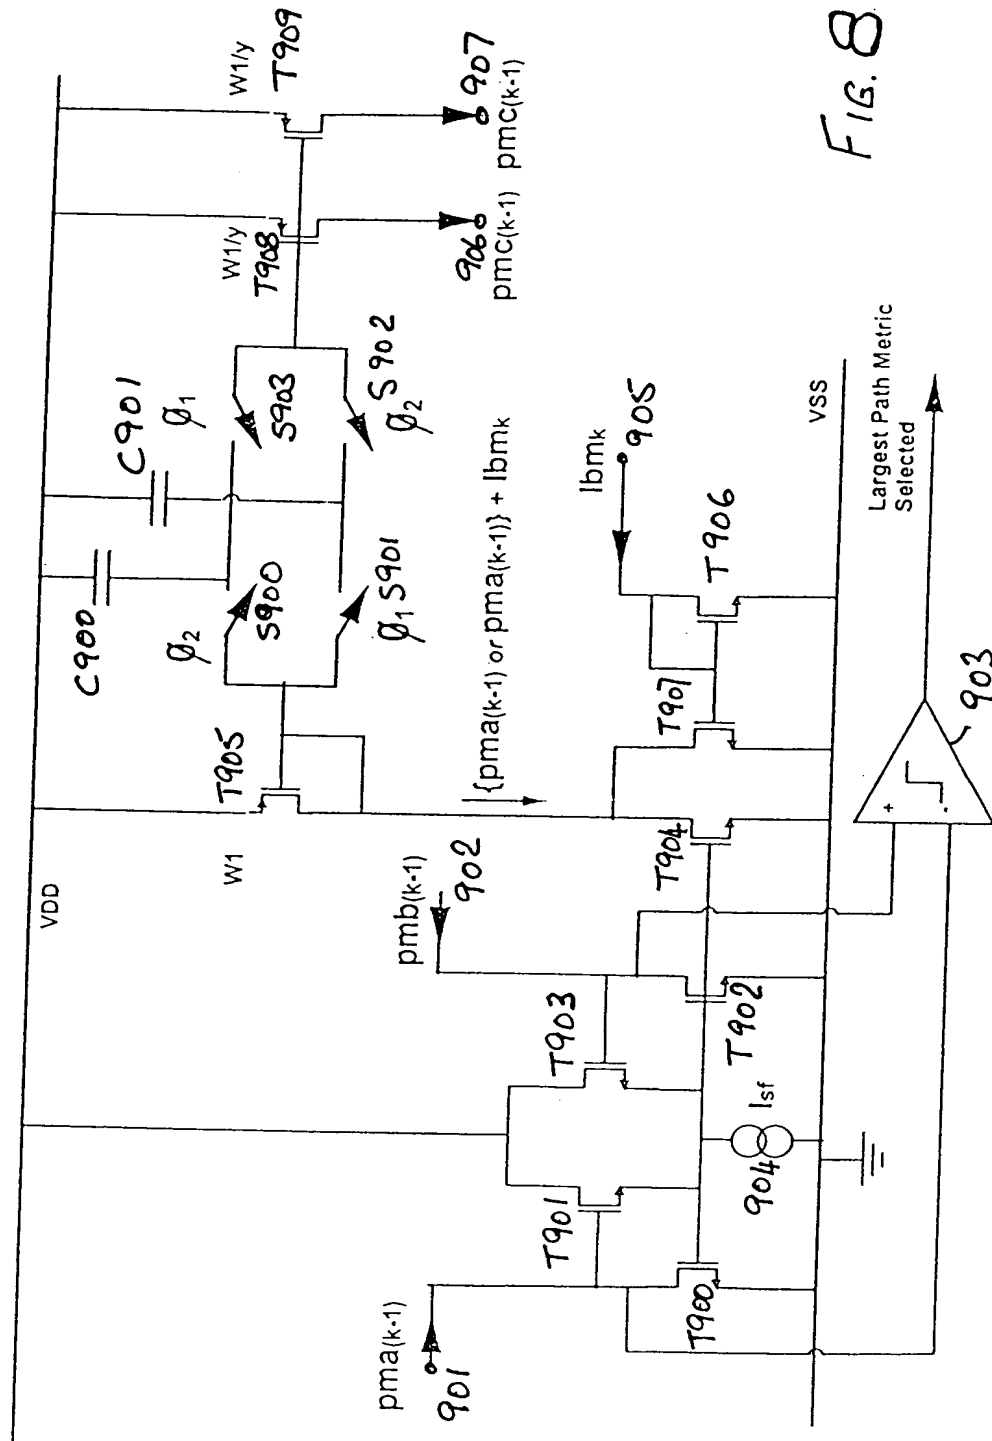

THIS PAGE BLANK (USPTO)

-1 -1 -1 -1 -1	1
-1 -1 -1 -1 1	2
-1 -1 -1 1 1	3
-1 -1 1 1 1	4
-1 1 1 1 -1	5
-1 1 1 1 1	6
1 -1 -1 -1 -1	7
1 -1 -1 -1 1	8
1 1 -1 -1 -1	9
1 1 1 -1 -1	10
1 1 1 1 -1	11
1 1 1 1 1	12

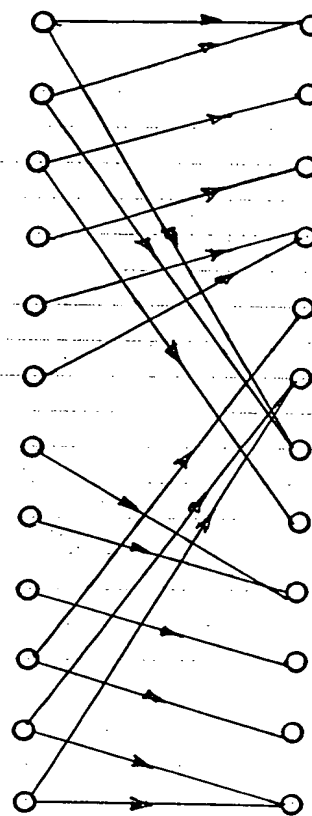


FIG. 9.

THIS PAGE BLANK (USPTO)

10/11

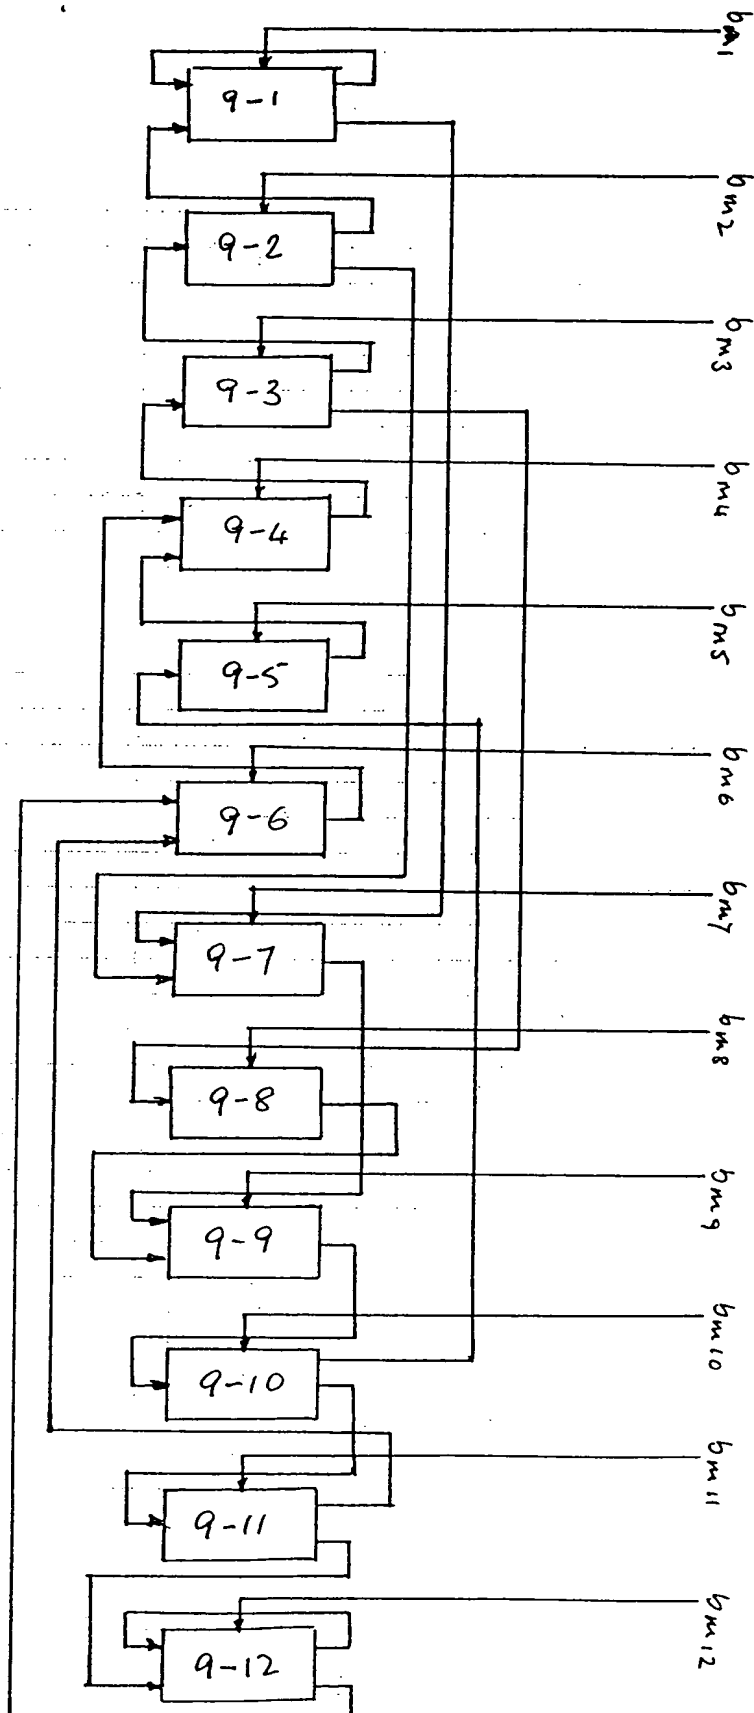


FIG 10

THIS PAGE BLANK (USPTO)

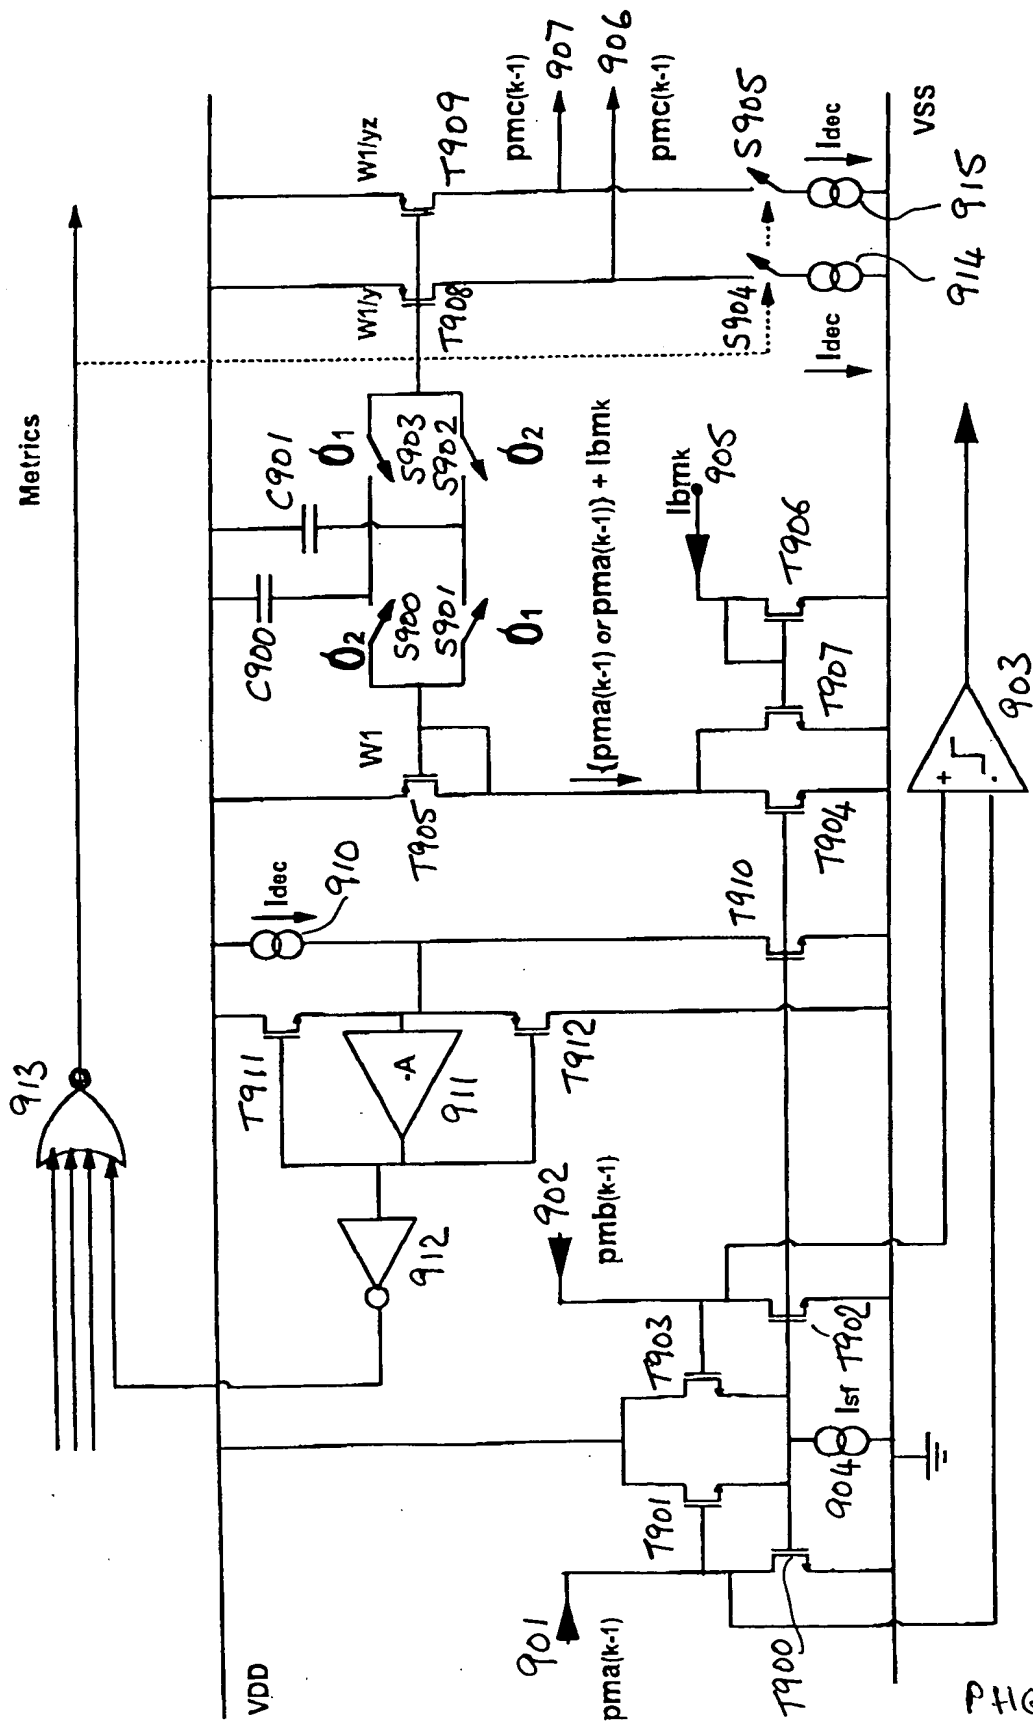


FIG. 11

PHGB000101

THIS PAGE BLANK (USPTO)